



TECHNICAL DESCRIPTION ROCKWHEEL D30

The Rockwheel D30 Hydraulic Cutting Unit can be supplied with either scaling/grinding cutting drums or rock cutting drums.

Specification Rockwheel D30

Maximum Input Power	- 110 kW	- 147.4 hp
Maximum Flow	- 460.0 lpm	- 101.2 UK gpm
Recommended Flow	- 320.0 lpm	- 70.4 UK gpm
Maximum Pressure	- 400 bar	- 5,801 psi
Output Shaft Torque	- 21,376 Nm @ 320 bar	- 15,767 lbf ft
Pick Force	- 63.2 kN @ 320 bar	- 14,197 lbf
Output Shaft Speed	- 76.0 rpm @ 320 lpm	- 76.0 rpm @ 70.4 UK gpm
Pick Speed	- 2.7 m/s @ 320 lpm	- 536 ft/min @ 70.4 UK gpm
Unit Weight	- 1,444 kg	- 3,183 lb
Excavator Range	- 26.0 – 38.0 tonne	- 26.0 – 38.0 tonne
No of Picks (Rock Drums)	- 60 (38/30 mm Stepped Shank)	- 60 (1.5" / 1.18" Stepped Shank)

If oil specification is below 46 centistokes at 40°C (ISO HV46) the performance must be downrated.



ROKLA


ROKLA GmbH - Hauptstr. 197 - 74595 Langenburg

T +49 (0) 7905 94199 - 12 F +49 (0) 7905 94199 - 20

E info@rockwheel.com W www.rockwheel.com



To simplify installation the Rockwheel TD-40 mounting flange is designed to suit existing hydraulic breakers.

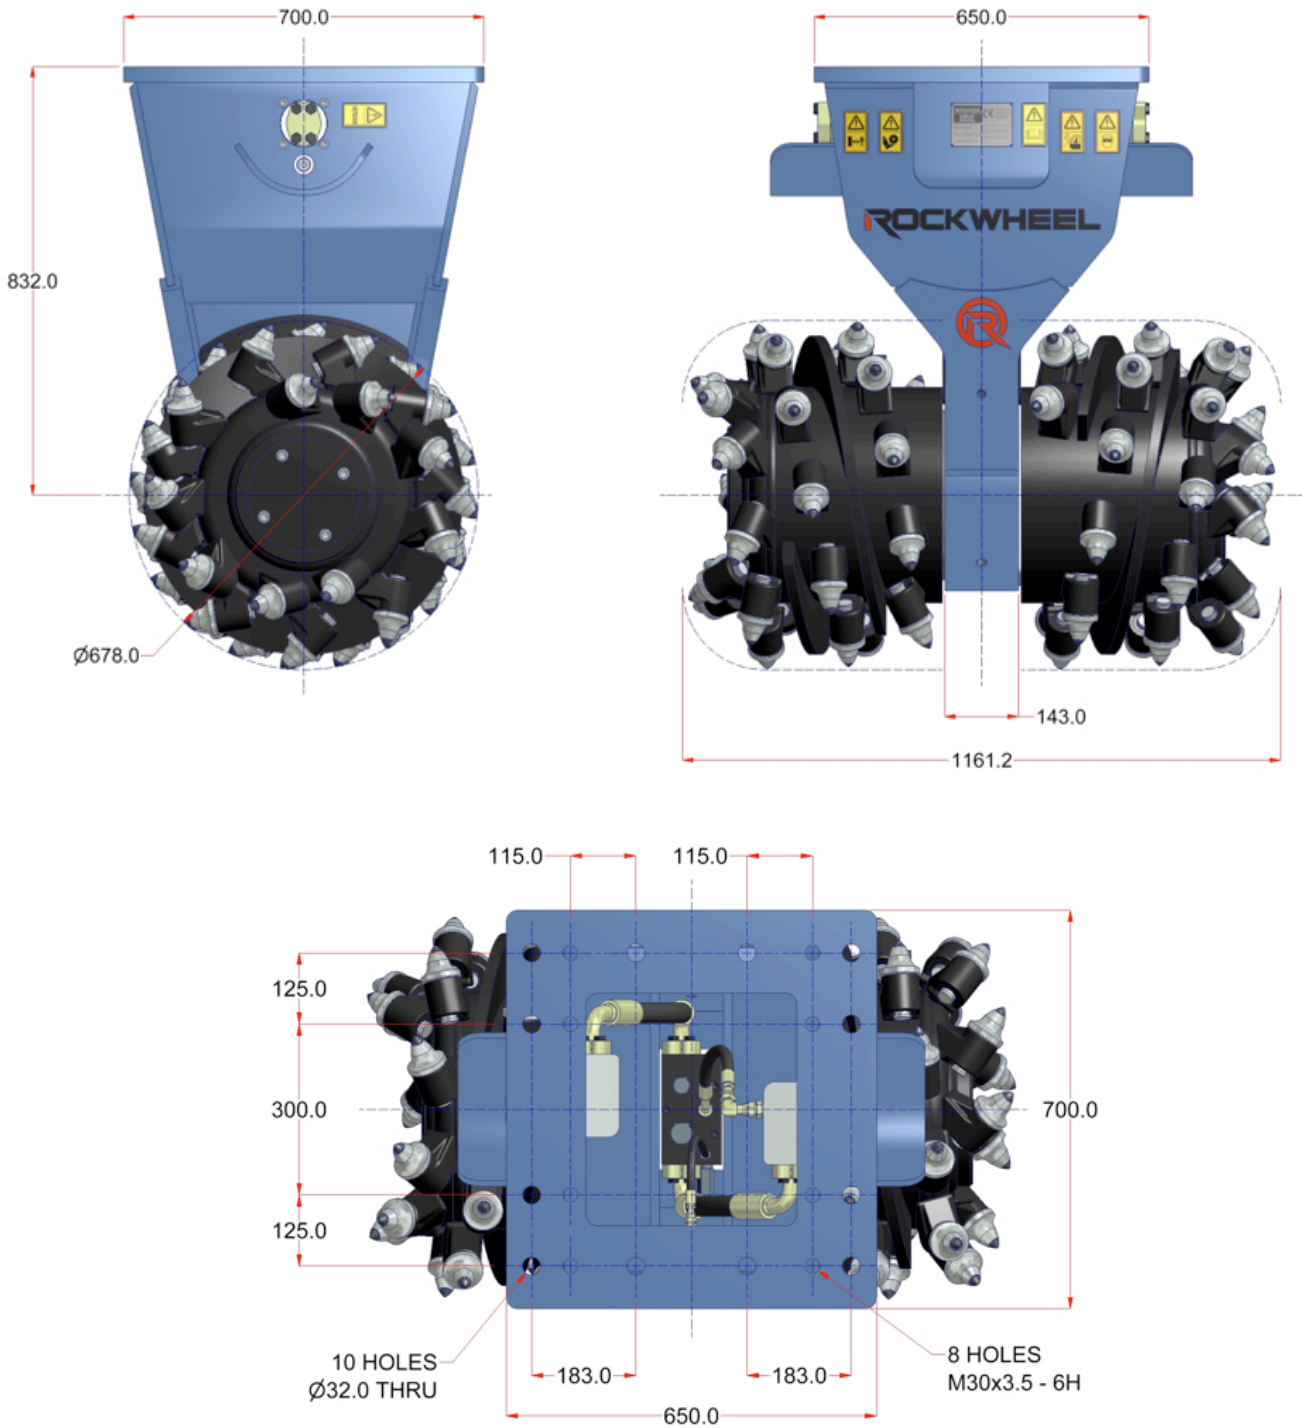

ROKLA

ROKLA GmbH - Hauptstr. 197 - 74595 Langenburg
T +49 (0) 7905 94199 - 12 F +49 (0) 7905 94199 - 20
E info@rockwheel.com W www.rockwheel.com